

POI (18In&4Out)- CDMA/GSM/DCS/WCDMA


Model No: 2077016-A

Features

- Include 3 sects of GSM900 Frequency、 1sect of CDMA Frequency 、 3 sects of GSM1800 Frequency、 and 2 sects of WCDMA Frequency
- Tx、 Rx each 4 way output
- Applied in indoor coverage in sub way ,high building, and airport.



Diagram

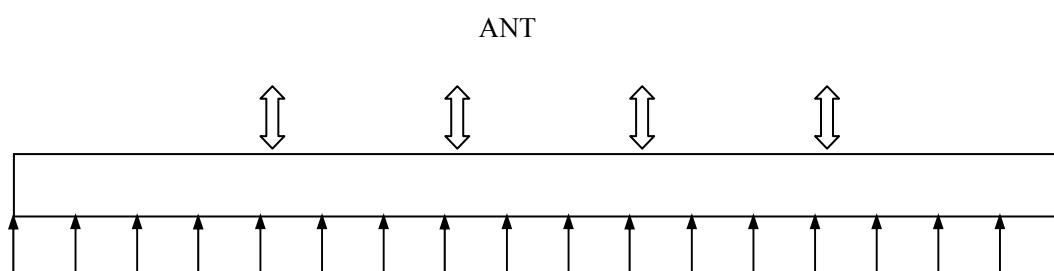

Technical Specification

Frequency Range(MHz)	GSM	907.4-914.9/952.4-959.9,899.3-906.8/944.3-951.8 891.5-899/936.5-944
	DCS	1775-1784.8/1870-1879.8,1735-1749.8/1830-1844.8 1729-1734/1824-1829
	WCDMA	1950-1964.8/2140-2154.8, 1965.2-1980/2155.2-2170
	CDMA	825-835/870-880
Insertion Loss (dB)		6.0
Isolation (dB)		Isolation between adjacent Input Port system>40
		Isolation between different Input Port system >80
		Transmitter and receiver Isolation >80
Return Loss (dB)		60@400~815MHz和12493.5~5800MHz
Power Handing (W)		≥18
Impedance(Ω)		50W
PIM (dBc)		50
		≤-140dBc

