

# POI (22In&4Out)-GSM/CDMA/WCDMA


**Model No: 2080001**

## Features

- Customizing for communication systems in Hong Kong, inclusive 3 sects of GSM900,2 sects CDMA 800,6 sects GSM1800 Frequency
- Maximum combination loss:<6.0dB, Monitor can be optional
- Isolation:80dB;
- Applied in indoor coverage in sub way ,high building, and airport.



## Diagram

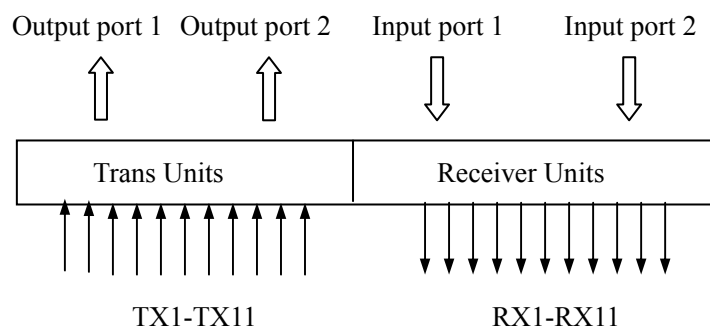

## Technical Specification

Frequency Range (MHz)	TX	870-880, 880-887.5, 935-942.5, 942.5-952.5, 952.5-960
	RX	1815-1825.1, 1825-1835.1, 1835-1845.1, 1845-1855.1
	TX	1855-1865.1, 1865-1875.1
	RX	825-835, 835-842.5, 890-897.5, 897.5-997.5, 997.5-915
	TX	1720-1730.1, 1730-1740.1, 1740-1750.1, 1750-1760.1
	RX	1760-1770.1, 1770.-1780
Insertion Loss (dB)		6.0
VSWR		1.5
Isolation (dB)	In band/Out band	20/80
Power Handling (W)	TX/RX	200W/50W
PIM (dBc)		≤-130dBc