

POI (13In&2Out)- DCS/CDMA/WCDMA


Model No: 2077010

Features

- Inclusive 1 sect CDMA1900、2 sects CDMA800、5 sects GSM1800 and 5 sects WCDMA Frequency
- Maximum combination loss:<8dB, Monitor can be optional
- Applied in indoor coverage in sub way ,high building, and airport.



Diagram

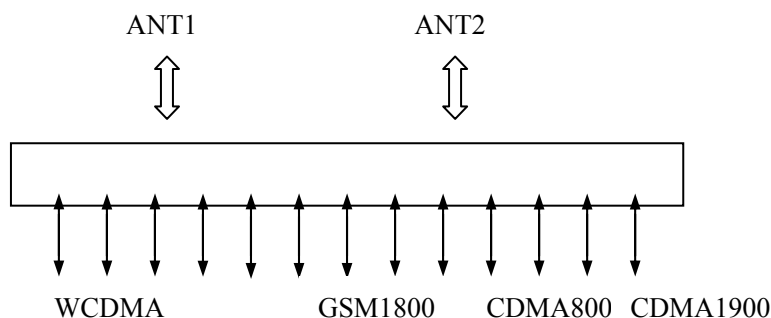

Technical Specification

Frequency Range(MHz)	CDMA1900	1900-1910/1980-1990
	CDMA800	825-835/870-880, 835-845/880-890
	DCS	1710-1717.5/1805-1812.5, 1717.5-1722.5/1812.5-1817.5, 1722.5-1730/1817.5-1825, 1730-1745/1825-1840, 1755-1785/1780-1880
	WCDMA	1920-1930/2110-2120, 1930-1940/2120-2130 1940-1945/2130-2135, 1945-1950/2135-2140, 1950-1965/2140-2155
Insertion Loss (dB)		8.0
VSWR		1.5
Isolation (dB)	In band/Out band	40/100
Power Handling (W)		200W
PIM (dBc)		≤-130dBc