

POI (12In&8Out)- GSM/DCS


Model No: 2077015

Features

- Include 3 sects of GSM1800 Frequency and 1 sect of GSM1800 Frequency
- Tx、Rx each 4 way output
- Applied in indoor coverage in sub way ,high building, and airport.



Diagram

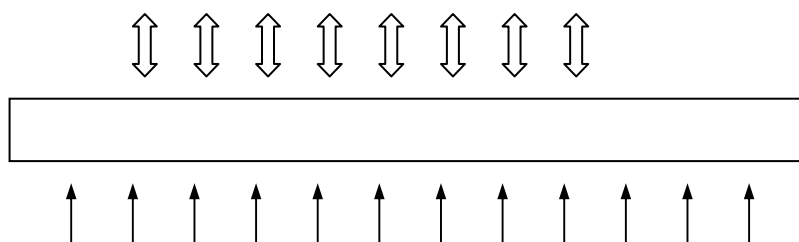

Technical Specification

| | | |
|----------------------|-----|----------------------------------------------------------------------------------------|
| Frequency Range(MHz) | GSM | 907.4-914.9/952.4-959.9,899.3-906.8/944.3-951.8 891.5-899/936.5-944 |
| | DCS | 1775-1784.8/1870-1879.8,1735-1749.8/1830-1844.8 1729-1734/1824-1829 |
| Insertion Loss (dB) | | 9.0/6.0/1.0 |
| Isolation (dB) | | ≥80between different Input Port system,≥80uplink to downlink |
| | | 60@400~815Mhz and 2493.5~5800MHZ Isolation between channel GSM900 @≥40, DCS1800@≥40 |
| Return Loss (dB) | | ≥19 |
| Power Handing (W) | | 50W |
| Impedance(Ω) | | 50 |
| PIM (dBc) | | ≤-140dBc |