

POI (12In&4Out)-GSM/CDMA/DCS/WCDMA


Model No: 2086001

Features

- Customizing for communication systems in Hong Kong inclusive GSM900,CDMA800,GSM1800 and 4 sects WCDMA Frequency
- Maximum combination loss:<5.0dB , Monitor can be optional
- Isolation:80dB;
- Applied in indoor coverage in sub way ,high building, and airport.



Diagram

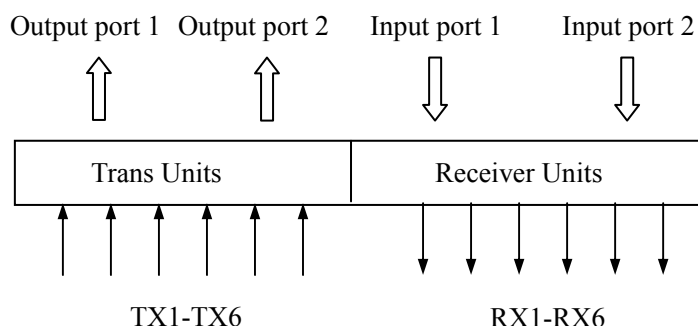

Technical Specification

Frequency Range (MHz)	TX	870-960, 1805-1880, 2110.3-2125.1, 2125.1-2139.9
	RX	2140.1-2154.9, 2154.9-2169.7
	TX	825-915, 1710-1785, 1920.3-1935.1, 1935.1-1949.9
	RX	1950.1-1964.9, 1964.9-1979.7
Insertion Loss (dB)	870-960/825-915	0.4
	1805-1880/1710-1785	0.6
	WCDMA	5.0
VSWR		1.5
Isolation (dB)	In band/Out band	20/80
Power Handling (W)	TX/RX	200W/50W
PIM (dBc)		≤-130dBc

