

# POI (11In&4Out)-TETRA/CDMA/GSM/DCS/WCDMA


**Model No: 2077023-A**

## Features

- Include 2 sects of TETRA800 Frequency, 1sect of CDMA Frequency、3sects of GSM900 Frequency、3sects of GSM1800 Frequency and 2 sects of WCDMA Frequenc
- Four way output
- Applied in indoor coverage in sub way ,high building, and airport.



## Diagram

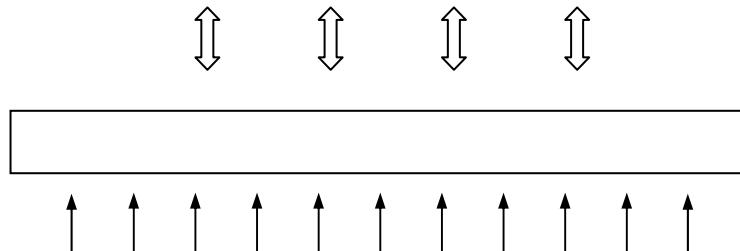

## Technical Specification

Frequency Range(MHz)	TETRA800	806.175-809.675/851.175-854.675, 815-824/860-869
	CDMA800	825-835/870-880
	GSM900	891.5-899/936.5-944, 899.3-906.8/944.3-951.8, 907.4-914.9/952.4-959.9
	GSM1800	1724-1734/1819-1829, 1735-1760/1830-1855, 1770-1784.8/1865-1879.8
	WCDMA	1950-1965/2140-2155, 1965-1980/2155-2170
Insertion Loss (dB)		8
Isolation (dB)	In band/Out band	35/ 90
Return Loss (dB)		≥18
Power Handing (W)		50W
Impedance( Ω )		50
PIM (dBc)		≤-140dBc