

POI (11In&2Out)-GSM/DCS/WCDMA


Model No: 2077025-A

Features

- Include 3 sects of GSM900 Frequency、 4 sects of GSM1800 Frequency and 4 sects of WCDMA Frequency
- Two way output
- Applied in indoor coverage in sub way ,high building, and airport.



Diagram

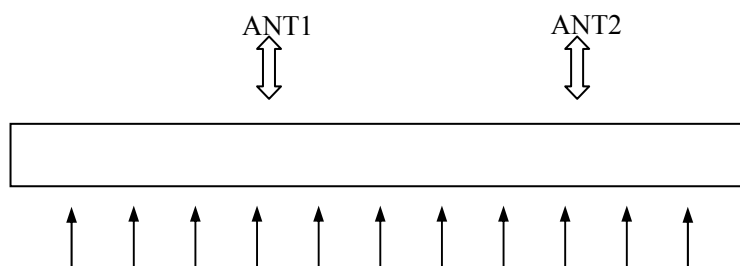

Technical Specification

Frequency Range(MHz)	GSM900	890-897.5/935-942.5, 897.5-907.5/942.5-952.5, 907.5-915/952.5-960
	DCS	1730.1-1740.1/1825.1-1835.1, 1750.1-1760.1/1845.1-1855.1
		1770.1-1780.1/1865.1-1875.1
WCDMA	1920.3-1935.1/2110.3-2125.1, 1935.1-1949.9/2125.1-2139.9	
	1950.1-1964.9/2140.1-2154.9, 1964.9-1979.7/2154.9-2169.7	
Insertion Loss (dB)		5.5
Isolation (dB)	In band/Out band	35/ 80
Return Loss (dB)		≥18
Power Handing (W)		50W
Impedance(Ω)		50
PIM (dBc)		≤-140dBc