

POI (10In&2Out)- GSM/WCDMA


Model No: 2077004-3G

Features

- Inclusive 1sect GSM900 and 4 sects WCDMA Frequency;
- Inclusive 2 divided transceiver units
- Maximum combination loss:<5.5dB, Monitor can be optional
- Isolation:80dB;
- Applied in indoor coverage in sub way ,high building, and airport.



Diagram

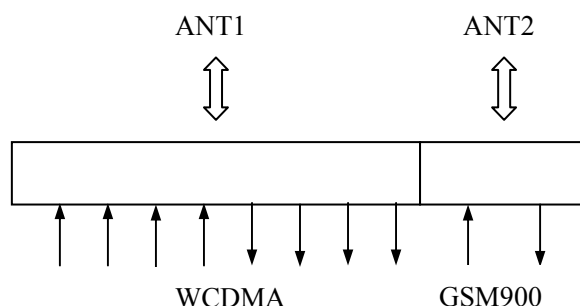

Technical Specification

Frequency (MHz)	Range	TX	940-955, 2110-2125, 2125-2135, 2135-2150, 2150-2165
		RX	895-910, 1920-1935, 1935-1945, 1945-1960, 1960-1975
Insertion Loss (dB)		GSM	1.5
		WCDMA	5.5
VSWR			1.5
Isolation (dB)	In band/Out band		20/80
Power Handling (W)			100W
PIM (dBc)			≤-130dBc