

POI (8In&2Out)- IDEN/GSM/CDMA/WCDMA


■ **Model No:** 2077003

■ **Features**

- This kind of POI inclusive IDEN/GSM(2 sects)/CDMA/WCDMA Frequency
- Separated input and output channel
- Maximum combination loss:<6dB, Monitor can be optional
- Applied in indoor coverage in sub way ,high building, and airport.



■ **Diagram**

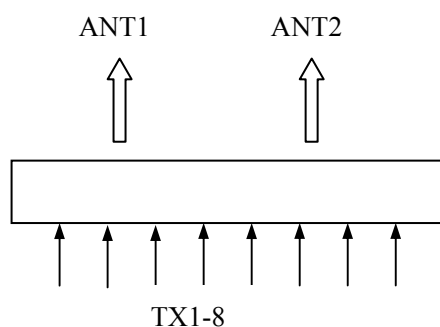

■ **Technical Specification**

Frequency Range(MHz)	RX	851-866 MHz, 870-880 MHz, 930-954 MHz, 954-960 MHz
	TX	2110-2125 MHz, 2125-2140 MHz, 2140-2155 MHz, 2155-2170 MHz
Insertion Loss (dB)	2G	5
	3G	6
VSWR		1.4
Isolation (dB)	In band/Out band	35/85
Power Handling (W)	RX/TX	50W/200W
PIM (dBc)		≤-130dBc